

# COMMERCIAL LIGHTING

Industrial & Commercial Lighting

CHALAAT  
ฉลาด

## LED HIGHBAY LIGHT Millet Series



COMMERCIAL LIGHTING

200106



## HIGHBAY LIGHT Millet Series

### Product Features:

- 1) High quality aluminium housing with great heat sink design which guarantees low operating temperatures.
- 2) Significant energy savings compared to traditional highbays.
- 3) Can be used in any manufacturing facilities, warehouses, tunnels and any industrial applications.
- 4) Built in 1-10V dimming function- option for sensors or control systems.
- 5) Great lumen output up to 125Lm(CRI 80) or 130Lm per watt(CRI 70).
- 6) Integrated MEANWELL driver.
- 7) Tempered glass.
- 8) Angle adjustable support(22.5°/45°).
- 9) Supplied with 30cm power cable.
- 10) (L70) >50,000 hour lifetime.
- 11) 5 Year Warranty.
- 12) Can be ceiling mounted rod installation & chain suspension.
- 13) Aluminum reflector only needed for SMD 2835 & 5630 light source to have 60° or 90° beam angle.



Support



Iron Chain



Steel Hanging Rod



HGB Series




ELG-C Series



Aluminum Reflector

# HIGHBAY LIGHT

## Millet Series

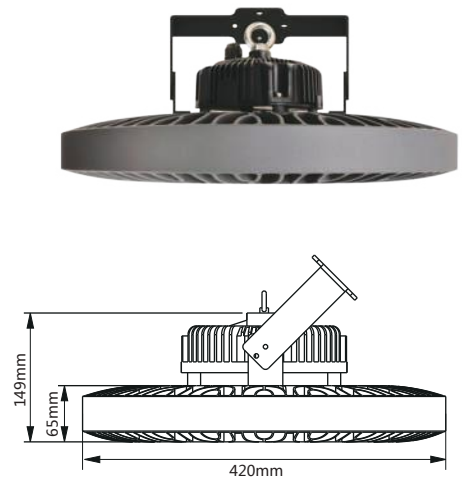

Art.No.(Millet Series)	M-HL-RI100W			M-HL-RI150W			M-HL-RI220W		
Power Consumption	100W			150W			220W		
Color Temperature	3000K	4000K	6500K	3000K	4000K	6500K	3000K	4000K	6500K
Total Lumen Output (CREE XTE With Lens)	11000Lm	12000Lm	12000Lm	16500Lm	18000Lm	18000Lm	24200Lm	26400Lm	26400Lm
Total Lumen Output (Philips Lumileds 3030 With Lens)	10000Lm	11000Lm	11000Lm	15000Lm	16500Lm	16500Lm	22000Lm	24200Lm	24200Lm
Total Lumen Output (Philips Lumileds 3030 With Reflector)	11000Lm	12000Lm	12000Lm	16500Lm	18000Lm	18000Lm	24200Lm	26400Lm	26400Lm
Total Lumen Output (LG 5630 With Reflector)	11500Lm	12000Lm	12500Lm	17250Lm	18750Lm	18000Lm	25300Lm	27500Lm	26400Lm
Total Lumen Output (Lextar 2835 With Reflector)	10000Lm	10500Lm	10500Lm	15750Lm	16500Lm	16500Lm	22000Lm	24200Lm	24200Lm
CRI	> 80 (CRI70 Optional)								
Voltage Range	90-305VAC (MEANWELL HBG Series)			180-295VAC (MEANWELL ELG-C Series)					
Weight	9.52KG			8.85KG					
Working Temperature(Ta)	-40° TO +60°			-40° TO +70°					
Power Factor	> 0.95								
Beam Angle	120° ( 60° 90° Optional )								
Dimensions	420*139mm			420*140mm			420*149mm		
Dimmable	Yes								



**HIGHBAY LIGHT**  
Millet Series




CREE high power XTE



Philips 3030

**100W Philips 3030**

LUMINOUS INTENSITY DISTRIBUTION

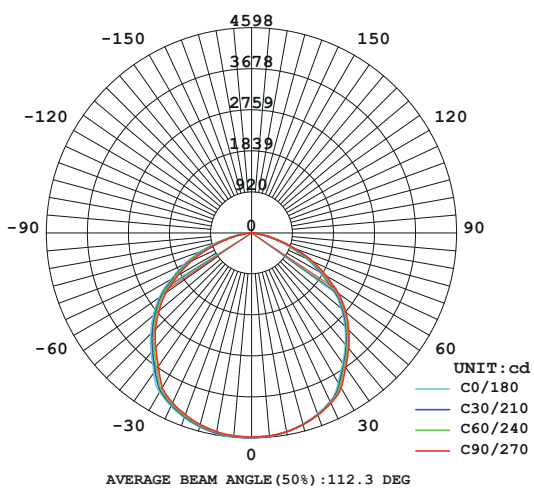

**100W Philips 3030**

